



**DATASHEET**  
**WALL-MOUNT**  
**& SOHO RACKS**  
**PREMIUM RUN**

**CONTEG**

# WALL-MOUNT & SOHO RACKS

## PREMIUM RUN




RUN-09-60/60

➤ **Wall-Mount PREMIUM RUN racks** are designed for wall-mount installation with extended access.

### MAIN ADVANTAGES

- Excellent rigidity
- Unobstructed access to installed equipment from front and sides
- Lockable side panels
- Load rating up to 60 kg

COLOR:  RAL 7035

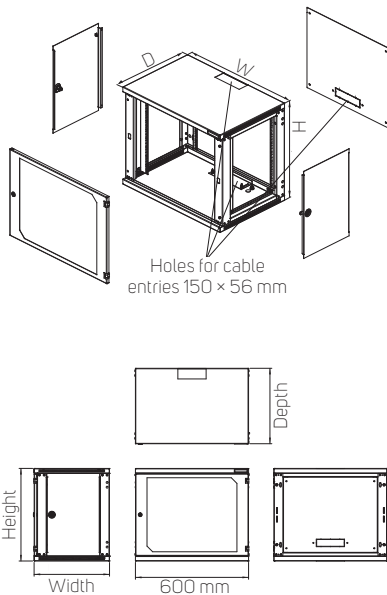

Code	H (in U)	Dimensions (mm)				Dimensions incl. packing (mm)			Gross weight (kg)
		H	W	D	Useful depth	H	W	D	
RUN-06-60/40	6	358	600	400	380	378	620	430	16
RUN-09-60/40	9	491	600	400	380	510	620	430	20
RUN-12-60/40	12	624	600	400	380	645	620	430	23
RUN-15-60/40	15	758	600	400	380	778	620	430	27
RUN-18-60/40	18	891	600	400	380	910	620	430	33
RUN-21-60/40	21	1025	603	400	380	1044	620	430	40
RUN-06-60/50	6	358	600	500	480	378	620	530	18
RUN-09-60/50	9	491	600	500	480	510	620	530	23
RUN-12-60/50	12	624	600	500	480	645	620	530	26
RUN-15-60/50	15	758	600	500	480	778	620	530	30
RUN-18-60/50	18	891	600	500	480	910	620	530	36
RUN-21-60/50	21	1025	603	500	480	1044	620	530	42
RUN-06-60/60	6	358	603	600	580	378	620	630	20
RUN-09-60/60	9	491	603	600	580	510	620	630	26
RUN-12-60/60	12	624	603	600	580	645	620	630	29
RUN-15-60/60	15	758	603	600	580	778	620	630	33
RUN-18-60/60	18	891	603	600	580	910	620	630	39
RUN-21-60/60	21	1025	603	600	580	1044	620	630	45

## DESCRIPTION

### Sizes

- Height: 6, 9, 12, 15, 18, 21U
- Width: 600 mm
- Depth: 400, 500 or 600 mm

### Construction

- 1,25 mm/1,5 mm sheet steel

### Load rating

- Standard 60 kg balanced load

### IP rating

- Standard IP 30

### Colors

- Standard: RAL 7035
- Other colors on request

### Front door

- Security-glass (EN 12150-1) or sheet steel door
- Reversible door—easy re-hanging to open right or left
- Door opening angle 180°

### Rear panel

- Removable, with module for cable entry
- Mounting holes for wall installation on back

### Cable entries

- Top and bottom openings for cable entry, size 150 × 56 mm, knock out opening
- Can be covered by sliding blank panel with butterfly nuts (DP-DB-200×68) or brush cable entry (DP-KP-KAR3)—ordered separately
- Cable entries on the rear edge of enclosure for straight cable path alongside the wall

### Other

- Drilling template
- Extra pair of DP-LV-N-xx extrusions optional

### STANDARD CONFIGURATION:

- 1 pair sliding 19" vertical extrusions
- 2 removable side panels with lock
- Tinted security-glass door (EN 12150-1) with lock
- GND/earthing kit

**CONTEG, spol. s r.o.**

Na Vitezne plani 1719/4

140 00 Prague 4

Czech Republic

Tel.: +420 565 300 358

[conteg@conteg.com](mailto:conteg@conteg.com)

[www.conteg.com](http://www.conteg.com)

**CONTEG**